

Seattle R305

Cod: RSD 305 Seattle



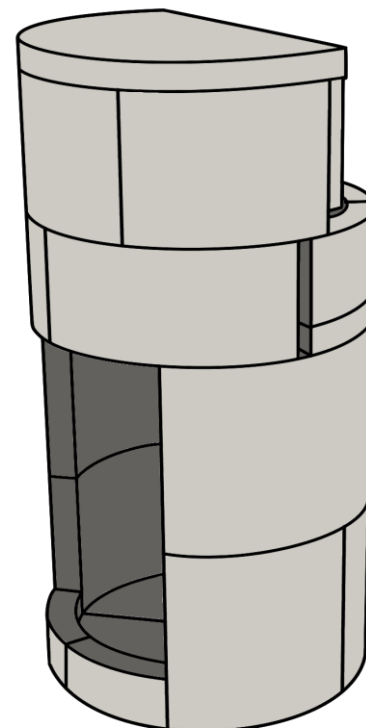
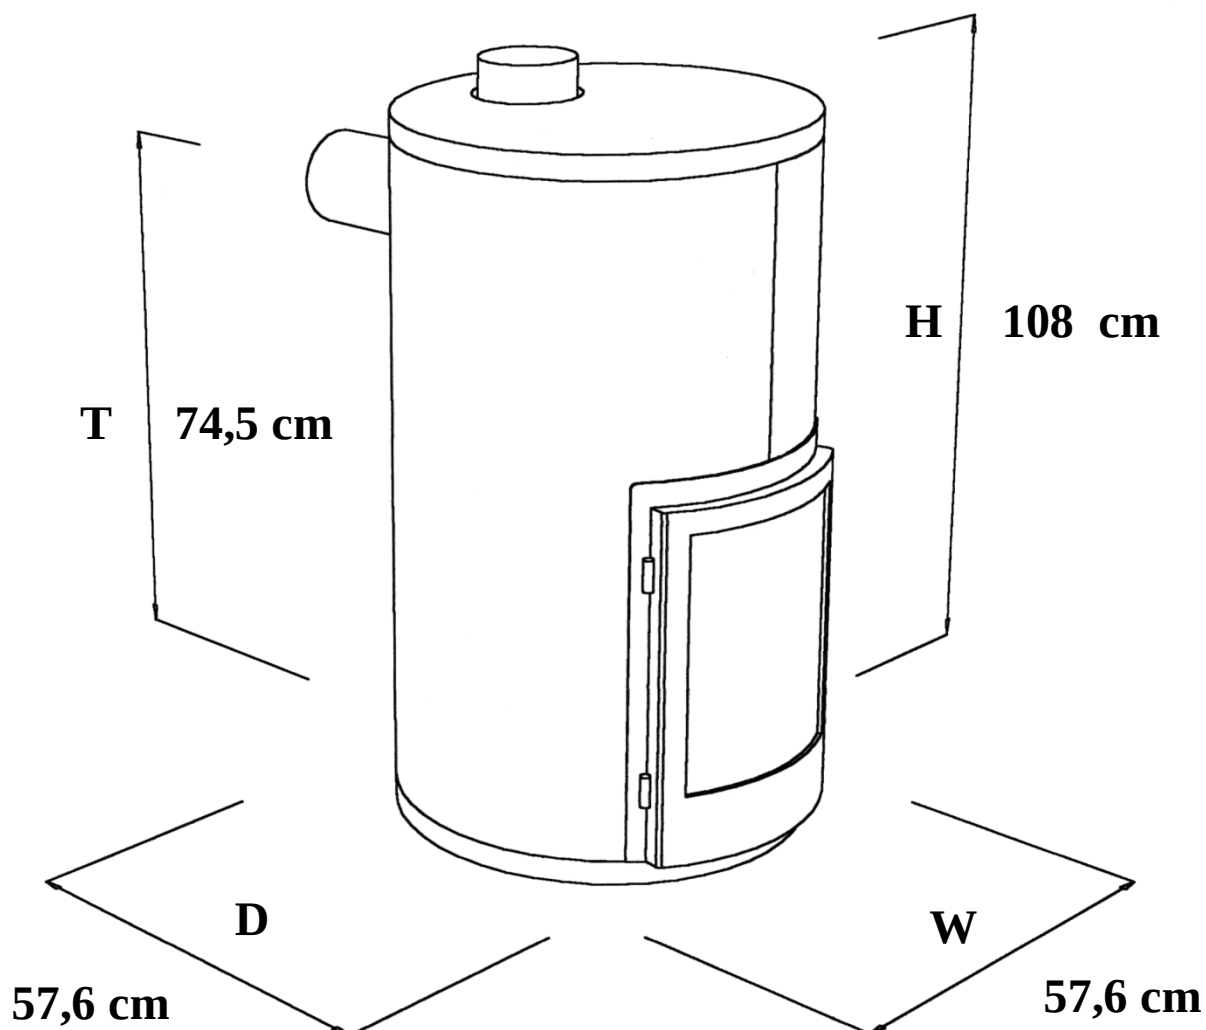

Stove: Modular storage system with hypo-caust system.

Features: The fireplace and the recycling flue are in marine basalt lava by 42 mm of thickness and cylindrical in shape all enclosed in a COR-TEN steel shell from 30/10 mm in turn covered in marine basalt lava of 42 mm thickness.


Heating system: Storage stove with radiant heating system. On request, it is possible transform the plant in an natural convection system.

Working system: Wood load every 6 / 8 hours.


Height – H	108 cm
Width – W	57,6 cm
Depth – D	57,6 cm
Axis height – T	74,5 cm
Drain diameter – Ø	14 cm
Vertical misalignment – V	12,3 cm
Door glass height	29,5 cm
Door height	45 cm
Weight	325 Kg
Max wood load	4.5 Kg
Power with a charge	13 KW
Max power	2,2 KW/h
Charging interval	6 / 8 h
Combustion performance	83%
Max system performance	81%
m³ heatable	Until 373 m³

**Inner Stove**

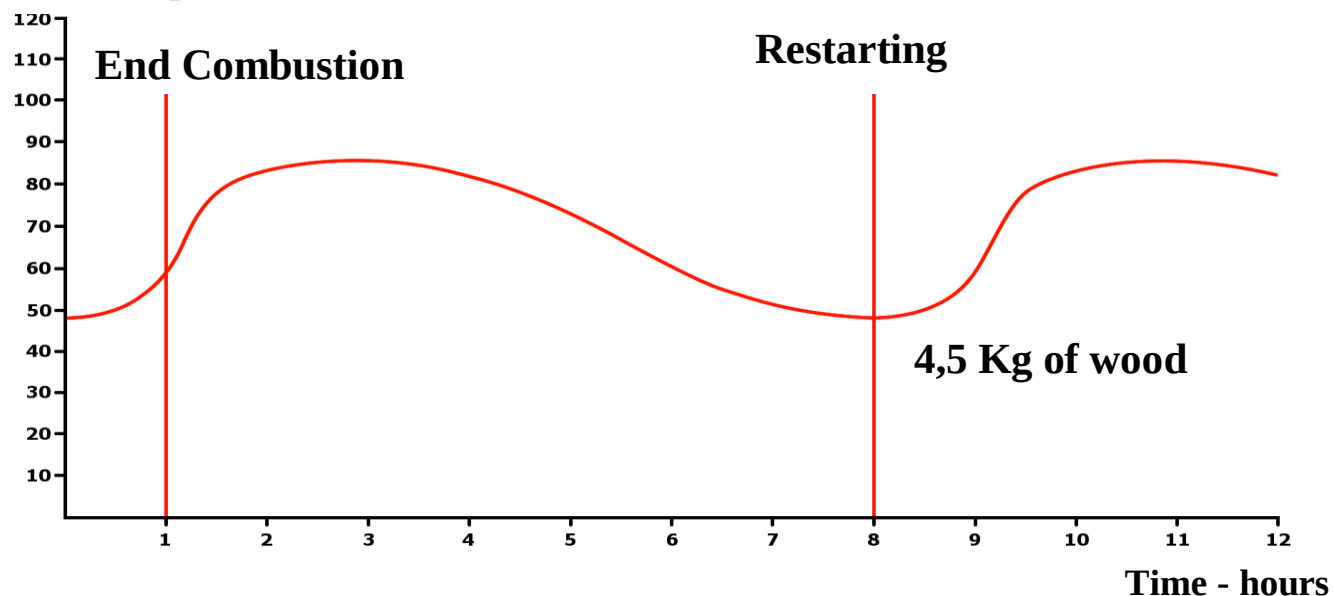Stove Temperature



CO Emissions p.p.m.

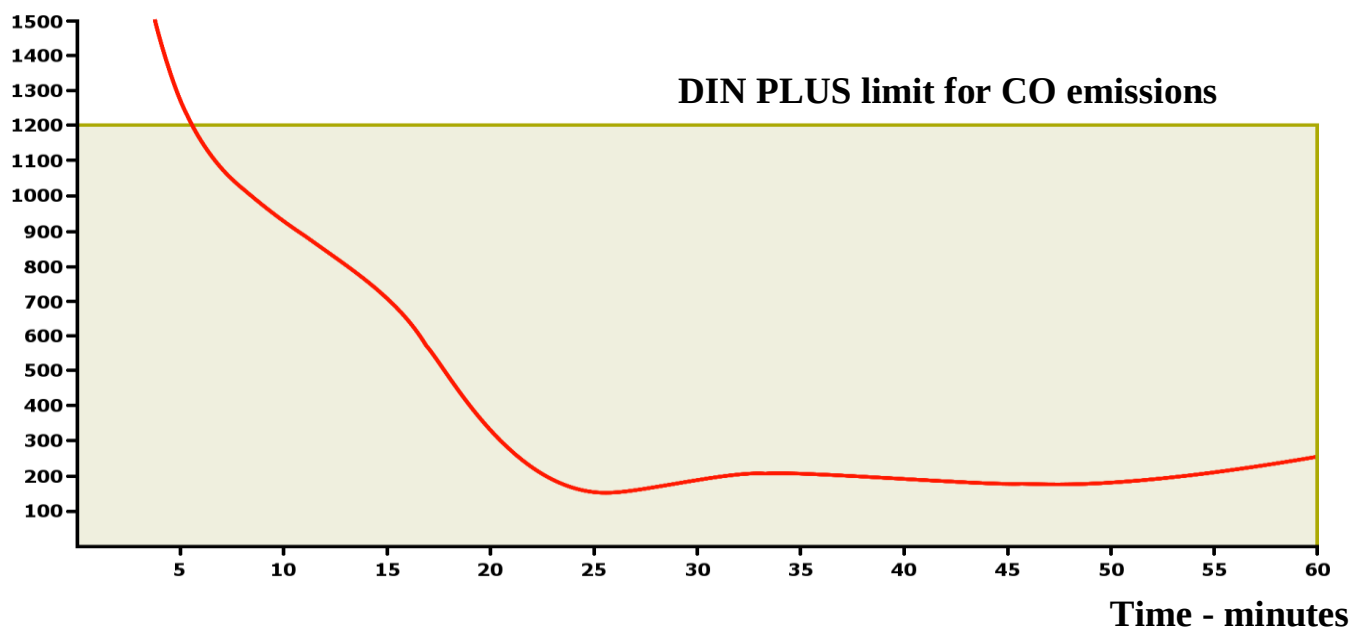

Combustion efficiency

DIN PLUS limit combustion efficiency

